

# CC LINEAR



## PrimeLine NFC L-HSP DALI2 B2L-ready

**187031, 187032**

### Typical Applications

Built-in in linear luminaires for

- Office lighting
- Industrial lighting



### PrimeLine NFC L-HSP DALI2 B2L-ready

- **SELECTABLE OUTPUT CURRENT VIA NFC**
- **DIMMABLE: DALI (ED. 2), D4i**
- **ADJUSTABLE OUTPUT CURRENT, CLO, DC LEVEL VIA NFC**
- **B2L READY: WITH INTEGRATED DALI POWER SUPPLY**
- **VERY LOW RIPPLE CURRENT: < 1%**
- **SURGE PROTECTION: UP TO 4 KV**
- **SUITABLE FOR EMERGENCY ESCAPE LIGHTING SYSTEMS ACC. TO EN 50172**
- **LONG SERVICE LIFE: UP TO 100,000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



## PrimeLine NFC L-HSP DALI2 B2L-ready

### Product features

- Linear casing shape

### Functions

- Programmable via NFC interface (contactless)
  - Selectable current output
  - Programmable CLO function
  - Adjustable DC level
- With integrated switchable DALI power supply

### Electrical features

- Mains voltage: 220–240 V  $\pm 10\%$
- Mains frequency: 50–60 Hz
- DC operation: 198–276 V, 0 Hz
- Push-in terminals: 0.2–1.5 mm<sup>2</sup>
- Power factor at full load: > 0.97
- Max. working voltage (U<sub>OUT</sub>): 300/400 V
- Secondary side switching of LED modules is not allowed.

### Dimming


- Dimming range: 1 to 100%

### Safety features

- Protection against transient main peaks up to 2 kV (between L and N) and up to 4 kV (between L/N and PE)
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection
- Protection against "no load" operation
- Degree of protection: IP00
- Protection class I

### Packaging units

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187031	20	48	270
187032	20	48	285

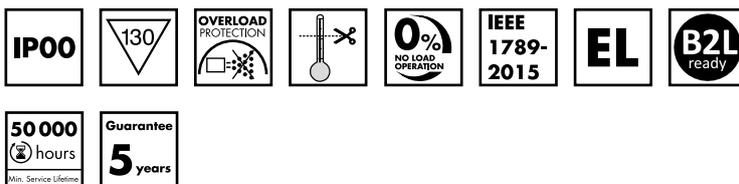


### Applied standards

- EN 60598-2-22
- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 62386 DALI Ed. 2 Part 101,102,207, 250,251,252,253
- EN 50172
- EN 55015

### Dimensions

- Casing: M10
- Length: 359 mm
- Width: 30 mm
- Height: 21 mm

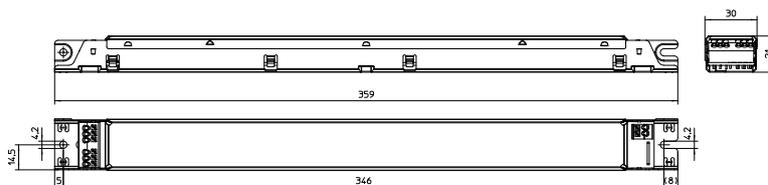

### Product guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage ([www.vossloh-schwabe.com](http://www.vossloh-schwabe.com)). We will be happy to send you these conditions upon request.



**Dimming**  
Analogue



**Current adjustment**



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

# LED Drivers – Primeline NFC L-HSP DALI2 B2L-ready

## Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / $\mu$ s	Current output DC mA ( $\pm$ 5%)	Voltage output DC (V)	DALI bus power supply (mA)		THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
								guaranteed	max.			
120	ECXd 800.424	<b>187031</b>	220–240	580–535	48 / 315	350–800	88–280	50	62	< 5	> 95	< 1
165	ECXd 800.425	<b>187032</b>	220–240	800–735	51 / 250	350–800	120–360	50	62	< 9	> 96	< 1

## Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at $t_c$ point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187031	-25	+50	5	60	-40	+85	5	95	+70	IP00
187032									+80	

## Expected service life time

at operation temperatures at  $t_c$  point

Operation current	Ref. No. 187031		187032	
	All	65 °C	70 °C	75 °C
hrs.	100,000	50,000	100,000	50,000

## Product labels


<ul style="list-style-type: none"> <li>■ </li> <li>■ </li> <li>■ da - DALI - Output</li> <li>■ da + 50 mA guaranteed</li> <li>■ da + 62 mA max</li> <li>□</li> </ul>	<b>INPUT</b> <b>UN = 220 - 240 V</b> IN = 580 - 535 mA fN = 0/50-60 Hz $\lambda$ = 0,97 Range of application DC 198-276 V	 <b>LIGHTING SOLUTIONS</b> Vossloh-Schwabe Deutschland GmbH Hohe Steinert 8, D-58509 Lüdenscheid Electronic converter for LED <b>Type ECXd 800.424</b> Ref.-No. 187031 Made in Serbia (Europe)	  Non isolated          	<table border="1"> <thead> <tr> <th colspan="2">OUTPUT</th> </tr> </thead> <tbody> <tr> <td>Irated [mA]</td> <td>350-800**</td> </tr> <tr> <td>Urated [V]</td> <td>88-280</td> </tr> <tr> <td>Prated [W]</td> <td>52-120</td> </tr> <tr> <td>t<sub>c</sub> [°C]</td> <td>70</td> </tr> <tr> <td>t<sub>o</sub> [°C]</td> <td>-25...+50</td> </tr> <tr> <td>Uout [V]</td> <td>&lt;300</td> </tr> </tbody> </table>	OUTPUT		Irated [mA]	350-800**	Urated [V]	88-280	Prated [W]	52-120	t <sub>c</sub> [°C]	70	t <sub>o</sub> [°C]	-25...+50	Uout [V]	<300	LED+ ■ LED- ■ 
OUTPUT																			
Irated [mA]	350-800**																		
Urated [V]	88-280																		
Prated [W]	52-120																		
t <sub>c</sub> [°C]	70																		
t <sub>o</sub> [°C]	-25...+50																		
Uout [V]	<300																		

<ul style="list-style-type: none"> <li>■ </li> <li>■ </li> <li>■ da - DALI - Output</li> <li>■ da + 50 mA guaranteed</li> <li>■ da + 62 mA max</li> <li>□</li> </ul>	<b>INPUT</b> <b>UN = 220 - 240 V</b> IN = 800 - 735 mA fN = 0/50-60 Hz $\lambda$ = 0,97 Range of application DC 198-276 V	 <b>LIGHTING SOLUTIONS</b> Vossloh-Schwabe Deutschland GmbH Hohe Steinert 8, D-58509 Lüdenscheid Electronic converter for LED <b>Type ECXd 800.425</b> Ref.-No. 187032 Made in Serbia (Europe)	  Non isolated          	<table border="1"> <thead> <tr> <th colspan="2">OUTPUT</th> </tr> </thead> <tbody> <tr> <td>Irated [mA]</td> <td>350-800**</td> </tr> <tr> <td>Urated [V]</td> <td>120-360</td> </tr> <tr> <td>Prated [W]</td> <td>95-165</td> </tr> <tr> <td>t<sub>c</sub> [°C]</td> <td>80</td> </tr> <tr> <td>t<sub>o</sub> [°C]</td> <td>-25...+50</td> </tr> <tr> <td>Uout [V]</td> <td>&lt;400</td> </tr> </tbody> </table>	OUTPUT		Irated [mA]	350-800**	Urated [V]	120-360	Prated [W]	95-165	t <sub>c</sub> [°C]	80	t <sub>o</sub> [°C]	-25...+50	Uout [V]	<400	LED+ ■ LED- ■ 
OUTPUT																			
Irated [mA]	350-800**																		
Urated [V]	120-360																		
Prated [W]	95-165																		
t <sub>c</sub> [°C]	80																		
t <sub>o</sub> [°C]	-25...+50																		
Uout [V]	<400																		


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Typ. performance graphs for 187031 / Type ECXd 800.424


### Working area

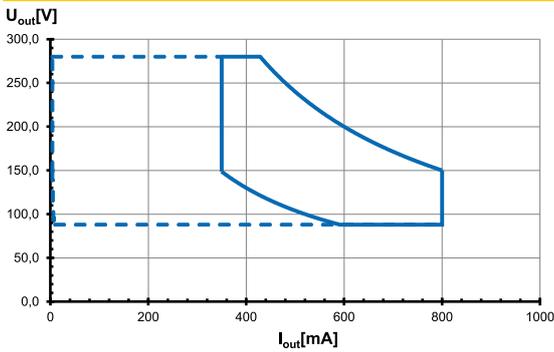


### Efficiency

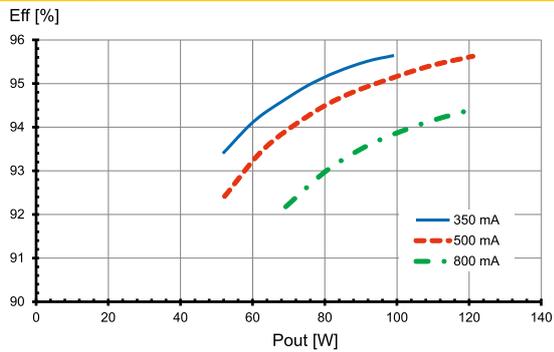

### Power factor

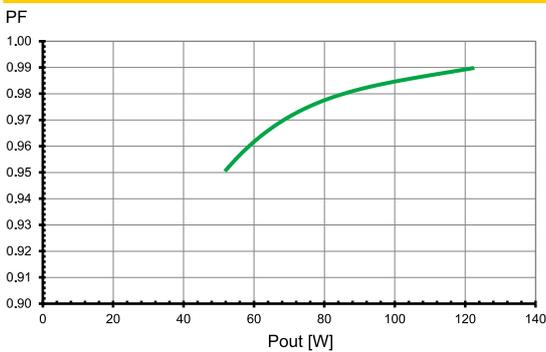


### Total harmonic factor (THD)

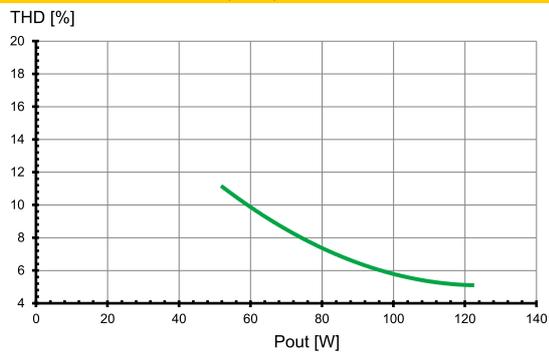


## Typ. performance graphs for 187032 / Type ECXd 800.425


### Working area

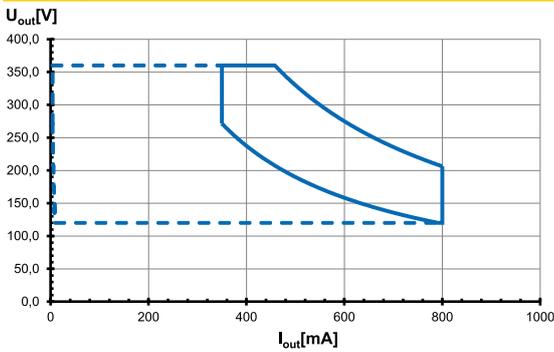


### Efficiency

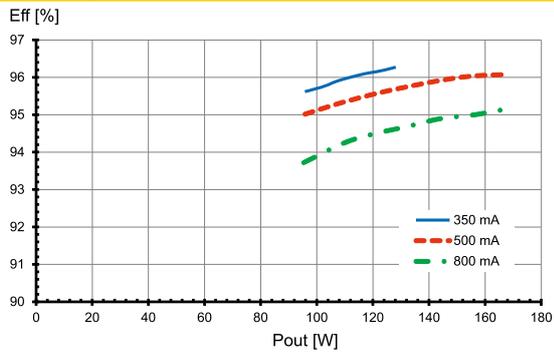

### Power factor

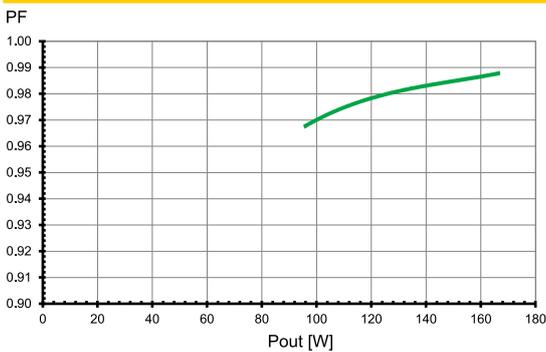

### Total harmonic factor (THD)

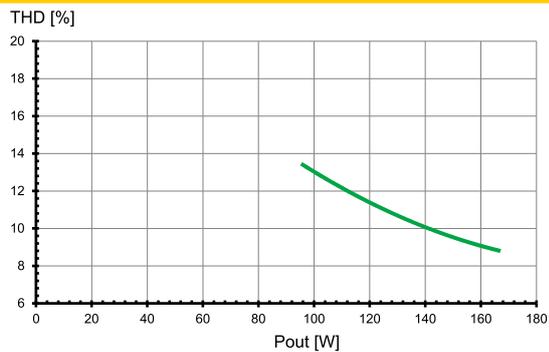

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Safety functions

- Transient mains peaks protection:  
Values are in compliance with EN 61547 (interference immunity).  
Surges between L-N: up to 2 kV  
Surges between L/N-PE: up to 4 kV
- Short-circuit protection: The control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: The control gear only works in range of rated output power and voltage problemfree.  
Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection acc. to EN 61347-1 C 5e.  
In case of overheating the control gear will reduce the output power.
- No load operation: The control gear is protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

## Output voltage (U<sub>OUT</sub>)

According to EN 61347-1, U<sub>OUT</sub> indicates which voltage can occur at the output terminals directly or between the output terminals and the PE terminal of the LED driver. This value is given for non-insulated drivers. The used LED module must have an insulation voltage that is at least as high as the specified U<sub>OUT</sub> voltage of the driver.

## Leakage current

Leakage currents are present in all electronic converters or luminaires with PE connection and must be observed especially when using non-insulated LED drivers.

The PCB surfaces of LED modules form a capacitance with grounded LED aluminum circuit boards, heat sinks or mounting plates. This leads to capacitive leakage currents between the connection poles of the LED (+ and -) and the PE terminal. These capacitances should be kept as small as possible, since they are responsible for a possible glowing or flickering of the LEDs in standby mode. In extreme cases, the maximum permissible leakage current of the luminaire according to EN 60598 paragraph 10.3 may be exceeded. The leakage current is also relevant when using RCD circuit breakers.

## Parametrization via NFC

- DC and emergency lighting operation
  - The control gears are suitable for direct voltage operation (DC). Reliable DC operation is guaranteed if the specified working area of LED driver is maintained.
  - DC range: 198–276 V
  - Reducing to 176 V: With reduced service life time possible
  - Light level at DC operation (EOF1): 15% (adjustable)
  - DC level range: 0/1–100% (programmable via NFC)
  - DC operation: acc. to EN 60598-2-22 the LED current reduction at high temperature is limited to 50% to nominal current.
- Constant lumen output (CLO)
  - In the most cases the CLO function is used to reduce system performance over the life of an LED system.
  - The luminous flux of LED modules decreases in a step-wise manner up to the end of the modules' service life. To guarantee constant luminous flux, the output of the control gear must be gradually increased over its service life.
  - Defining the CLO function its needed to program the start, provisional and end value, respectively the LED lifetime via the NFC programmer.
- Current adjustment (mA)
  - Factory setting: minimum current
  - Programmable output current via NFC
- DALI power supply
  - Switchable DALI power supply via NFC or DALI
  - Factory settings: on
- DALI-Configuration
  - Programming of Short address, Groups, Fade times and Scenes
  - Programming of Lightlevel for Power On, System Failure, Min and Max
- DALI Memorybank 1
  - Store Luminaire information data according EN 62386-251
- Diagnostics and Maintenance
  - Set configurable values described in EN 62386-253, -254
  - Read counters described in EN 62386-252, -253, -254 (Refresh rate is 1 hours of control gear operating time.)

The driver can be programmed via NFC at the earliest 15 seconds after the mains voltage has been switched off.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## System architecture – NFC configuration

- With the NFC programmer (Ref. No. 186646) and the EnOcean USBStick (Ref. No. 186563) or alternatively with a Feig Programmer or the Feig NFC antenna, contactless programming of NFC LED drivers is possible.
- The LED driver is programmed via NFC in a de-energised state.
- The use of the NFC programmer is flexible in the production or already in the pre-assembly process. A complex commissioning is not required. The operation and parameterization is done in the simplest way. All operating parameters can be individually programmed and updated.
- The exact description of the programming can be found in the operation manual of the NFC programmer.



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

### Mandatory regulations

- DIN VDE 0100
- EN 60598-1


### Mechanical mounting

- Mounting position: Any position inside a luminaire is allowed. LED drivers are not allowed to use for independent applications.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices. Installation in outdoor luminaires: degree of protection for luminaire with water protection rate  $\geq 4$  (e.g. IP54 required).
- Degree of protection: IP00
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing. LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's  $t_c$  point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm


### Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of 0.2–1.5 mm<sup>2</sup>, AWG24-16
- Stripped length: 8.5–9.5 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference). Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: Is not allowed.
- Secondary load: The sum of forward voltages of LED loads (incl. tolerances) has to be within the values which are mentioned in the table "Electrical Characteristics" in this data sheet.

- Wiring diagram:



B2L with one B2L ready LED driver



B2L with more than two B2L ready LED drivers

- DALI wiring – Blu2Light ready:

As a standard DALI bus is not SELV-compliant, the DALI lead must be rated for mains voltage. The power supply and the DALI lead can be laid in a single cable provided the cable does not exceed a maximum length of 100 m, e.g. using 5x1.5 mm<sup>2</sup>. Please observe the maximum lengths of the DALI lead during installation:

	$\geq 1.5 \text{ mm}^2$	1 mm <sup>2</sup>	0.75 mm <sup>2</sup>	0.5 mm <sup>2</sup>
<b>6.2 <math>\Omega</math> max.</b>	300 m	180 m	130 m	80 m

- DALI power supply – Blu2Light ready:

The DALI2-B2L interface has an integrated power supply for further DALI devices, e.g. sensors. The programming unit must not exceed the max. current on the DALI bus of 250 mA including driver current. The DALI control system is connected via the terminal pair da+/da-. Please pay attention to the polarity.

- DALI supply voltage: Guaranteed possible current output: 50 mA

**Note:** With a parallel connection, the sum of guaranteed current output is the basis for calculating additional DALI participants. Please take the current consumption of active DALI devices (e.g. sensors) from the corresponding data sheet. Passive DALI devices (f.e. drivers without DALI power supply) are assumed to have a current consumption of 2 mA.

Max. possible current output: 62 mA

**Note:** When DALI power supplies are connected in parallel, it must be ensured that the sum of the maximum possible current output of all voltage sources on the DALI bus does not exceed 250 mA.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

## DALI

- DALI function: The DALI interface (Digital Addressable Lighting Interface) is a digital interface for communication between the control gear and the DALI control system. The DALI control system enables, for example, the dimming of the LED module. The respective triggers (e.g. by sensors) for dimming or parameter queries depend on the respective DALI control system. In addition, the control gear can be configured via the DALI interface. This requires an additional programming unit, e.g. commercially available DALI programming units. The DALI control system is connected via the terminal pair da/da.
- DALI bus: If the DALI bus is connected, the device starts with the preset PowerOnLevel 100%. If no DALI bus is connected, the device also starts with 100% light level in system failure mode.
- D4i: D4i drivers contain the standardized DALI bus power supply for further DALI devices according to DALI part 250. They also enable extended data functions:
  - DALI Part 251 – Luminaire data
  - DALI Part 252 – Performance data
  - DALI Part 253 – Diagnostic data

## Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs  
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction  
The release reaction of the automatic conductor cut-outs comply with VDE 0641, part 11, for B, C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers  
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 mΩ (approx. 20 m [2.5 mm<sup>2</sup>] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.		
<b>Automatic cut-out type B</b>				
		B 10 A	B 13 A	B 16 A
ECXd 800.424	<b>187031</b>	5	6	8
ECXd 800.425	<b>187032</b>	6	8	10
<b>Automatic cut-out type C</b>				
		C 10 A	C 13 A	C 16 A
ECXd 800.424	<b>187031</b>	8	11	14
ECXd 800.425	<b>187032</b>	10	13	16

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

## EU compliance information

Hereby, Vossloh-Schwabe Deutschland GmbH declares that the radio equipment type Primeline NFC L-HSP DALI2 B2L-ready is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address: [www.vossloh-schwabe.com](http://www.vossloh-schwabe.com).

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.