



DALI POWER SUPPLY



DALI POWER SUPPLY

For in-luminaire installation

The DALI Power Supply unit was designed to enable space-saving installation in a luminaire and lets you determine DALI devices within luminaires. The unit is particularly ideal for smart lighting concepts for office or industrial luminaires. And the DALI Power Supply unit can be used to implement island solutions with a maximum of flexibility.

new>>

The DALI Power Supply also serves as a power supply for existing DALI applications in order to make them Blu2Light-capable.

DALI Power Supply Functions

- **55 mA DALI BUS POWER SUPPLY UNIT**
- **SLIM-LINE CASING FOR LINEAR LUMINAIRE CONCEPTS**
- **OPERATING LIFETIME: 50.000 STD.**
- **PRODUCT GUARANTEE: 5 JAHRE**



DALI Power Supply

For in-luminaire installation

These light control devices are designed for operation inside a luminaire.

Technical Specifications

Ambient temperature t_a : 5 bis 50 °C

Service life: 50.000 h

Push-in terminals with a lever opening: 0,5–1,5 mm²

Degree of protection: IP20

Radio interference suppression

For luminaires of Protection Classes I and II

DALI devices are connected directly to the DALI bus.

The number of control gear units (DALI devices): depends on the power consumption of the connected devices.

Connections

Mains connection: 220–240 V AC/DC, 0/50–60 Hz,

max. power consumption 2 W

1 DALI bus on 2 pairs of terminals

current on the DALI bus:

I_{POWER SUPPLY GUARANTEED} = 55 mA

I_{POWER SUPPLY MAXIMUM} = 80 mA

(For current consumption of the individual components respective data sheet)

The DALI bus is not SELV as standard

the DALI cable must therefore be

be mains voltage-proof.

The DALI bus has an electronic

reversible overload and short-circuit protection.

Functions

Supply unit (55 mA) for DALI bus systems.

Extendable by switching outputs in parallel

(max. 4 outputs, 4 x 55 mA).

Connection of up to 20 DALI ballasts in combination

with a VS Blu2Light MultiSensor or

Connect ME to a DALI Power Supply.

Product guarantee

- 5 years
- The conditions for the Product Guarantee
- of the Vossloh-Schwabe Group shall apply
- as published on our homepage (www.vossloh-schwabe.com).
- We will be happy to send you these conditions upon request.




DALI Power Supply

Dimensions: (LxBxH): 147x21x18 mm

Weight: 38 g

Best.-Nr.: 186693

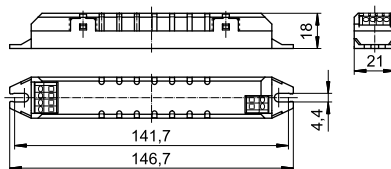

General Safety Instructions

- LiCS products may be installed and commissioned only by authorised and suitably trained staff.
- Prior to installation and commissioning, please read these instructions with care to ensure safe and correct handling.
- Only ever conduct any work on the devices in a voltage-free state.
- All valid safety and accident prevention directives must be observed.
- Unauthorised opening of the products is not permitted since this poses a danger to life through electrical shock. Repairs may be carried out only by the manufacturer.
- Never apply mains voltage or any other external voltage to the DALI control line as this can destroy individual components.

DALI Power Supply

Installation


- Install any way up.
- Only install in dry rooms or luminaires, boxes, casings or similar.
If the DALI Power Supply unit is destined for use in outdoor applications or high humidity rooms, casings with a corresponding degree of protection must be used.
- Attach with the help of 3 mm or 4 mm screws.
- Ensure a flat, solid surface for installation.

Application/Function

- Suitable for luminaire installation, must not be operated as a standalone device.
- Power supply unit (55 mA) for DALI bus systems.

Installation Instructions

- Conductor cross-section for all terminals: 0.5–1.5 mm²
- Cable preparation (see right)
- The standard version of the DALI bus features only basic insulation.
All DALI cables must therefore be mains-voltage-proof.
- The maximum permissible length of the DALI bus must not be exceeded during installation: the maximum length of the DALI bus totals 300 m, with a conductor cross-section of 1.5 mm².
- Depending on the number of connected DALI devices, the maximum permissible length of 300 m can be substantially reduced.
See datasheet for DALI devices.
- Laying the DALI bus line alongside the power supply line in a single cable is permissible up to a maximum of 100 m, with NYM 5 x 1.5 mm².

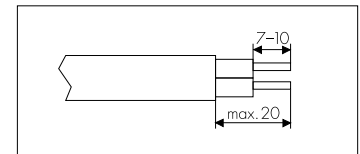


Important Notes

- Switching the outputs of the DALI Power Supply (55 mA) unit in parallel is permissible (max. 4 x 55 mA).
- Polarity must be observed.
- Please refer to the installation instructions included with the product and the applicable Blu2Light system data sheet "How to Blu2Light" before installation. Make sure that the Bluetooth radio signal can propagate freely according to the specifications.
- All Blu2Light devices (ME, XS, XL, XXL, ...) that are supplied via DALI may only be connected to one DALI power supply! Therefore, it is not permissible to connect several Blu2Light devices to one power supply. In this case, malfunctions will occur.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Circuit Diagram of the DALI Power Supply Unit

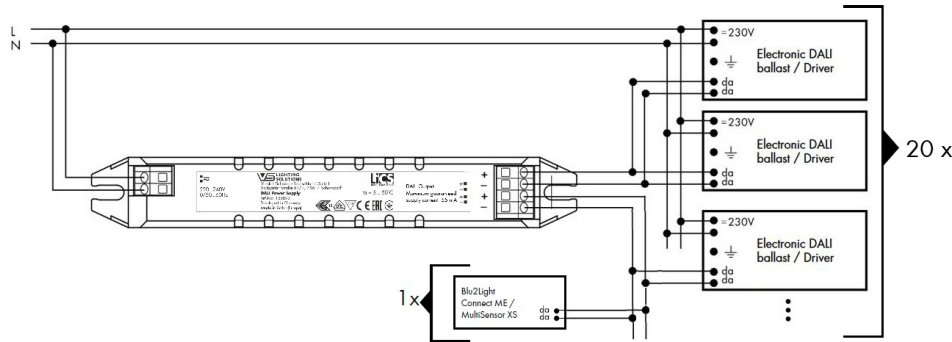

Technical Specifications of the DALI Power Supply Unit

	DALI Power Supply
Ref. No.:	186693
Supply voltage	220–240 V AC/DC, 0/50–60 Hz
Power consumption	2 W
Ambient temperature t_a	5 bis 50 °C
DALI-Output (da+–)	max. 55 mA consumption
Degree of Protection	IP20
Protection Class (luminaires)	I und II
Weight	38 g
CE requirement	Immunity to electromagnetic interference (EMC) in acc. with EN 61547, Radio interference suppression in acc. with EN 55015, Safety in acc. with EN 61347-2-11

Product label



220...240V
0/50...60Hz



Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
DALI Power Supply
Ref.No. 186693
Developed in Germany
Made in Serbia(Europe)



LiCS INDOOR
 $t_a = 5... 50^{\circ}\text{C}$

DALI Output
Maximum guaranteed
supply current: 55 mA

+ ■
- ■
+ ■
- ■



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.