

CC COMPACT DIP SWITCH



COMFORTLINE DIP SWITCH C

187566, 187567

Typical Applications

Built-in in compact luminaires for

- Shop lighting
- Office lighting
- Residential lighting
- Downlights



ComfortLine DIP switch C

- **SELECTABLE OUTPUT CURRENT VIA DIP SWITCH**
- **VARIOUS CORD GRIPS CAN BE FITTED**
- **SELV**
- **SUITABLE FOR EMERGENCY ESCAPE LIGHTING SYSTEMS ACC. TO EN 50172**
- **LONG SERVICE LIFE: UP TO 100.000 HRS.**
- **PRODUCT GUARANTEE: 5 YEARS**



ComfortLine DIP switch C

Product features

- Compact casing shape

Functions

- Selectable current output by dip-switch
- Suitable for central battery system for emergency lighting acc. to EN 50172

Electrical features

- Mains voltage: 220–240 V $\pm 10\%$
- Mains frequency: 50–60 Hz, 0 Hz
- DC Operation: 176–276 V (range of application)
- Push-in terminals:
rigid 0.5–1.5 mm²
strand 0.75–1.5 mm²
- Power factor at full load: > 0.95
- Open circuit voltage ($U_{max.}$): 60 V
- Secondary side switching of LED modules is not allowed.



Safety features

- Protection against transient main peaks up to 1 kV (between L and N)
- Electronic short-circuit protection
- Overload protection
- Degree of protection: IP20
- Protection class II
- SELV
- SVM: < 0.4
- PstLM: < 1

Ref. No.	Packaging unit		
	Pieces per box	Boxes per pallet	Weight g
187566	20	200	85
187567	20	200	120

Product guarantee


- 5 years
for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com).
We will be happy to send you these conditions upon request.

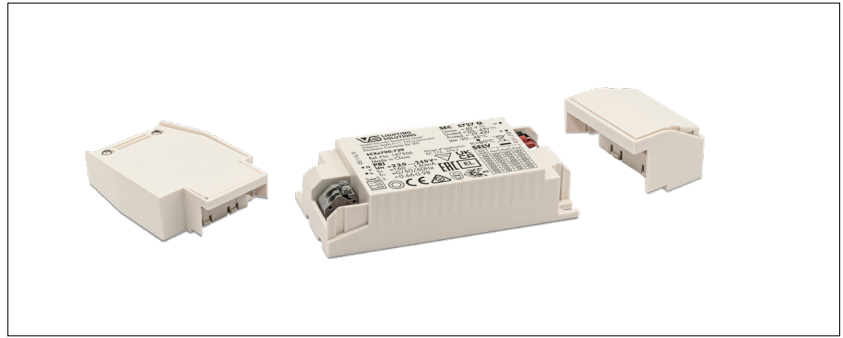

Dimensions


Ref. No.	Casing	Length mm	Width mm	Height mm
187566, 187567	K107	97	43	23

K107



Applied standards

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2/EN 61000-3-3
- EN 62384
- EN 55015
- EN 61000-4-2/EN 61000-4-5



Cord grip "sl" (screwless) for K107/K110

Available for independent operation

1 Cord-Grip contains one upper and one lower part

Available separately


2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-7mm

2x0.75-1.5mm² PVC cable

Packaging unit: 20 pcs.

Ref. No.: 187450 (1 pcs Cord Grip sl for K107/K110)



Cord grip "ws" (with screw) for K107/K110

Available for independent operation

Available separately


2 cord grips per LED driver required

Permitted diameter of the cable mantle: 3-9mm

2x0.75-1.5mm² PVC cable

Packaging unit: 20 pcs.

Ref. No.: 187451 (1 pcs Cord Grip sl for K107/K110)



Cord grip "LILO" for K107/K110

Available for independent operation

Available separately

Permitted diameter of the cable mantle: 5-12mm

3x0.75-2.5mm² PVC cable, "E" terminal for protective earth

Only for looping wiring, two cables

Packaging unit: 20 pcs.

Ref.-No.: 187453 (1 pcs LILO(3pin) for K107/K110)



The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Electrical characteristics

Max. output W	Type	Ref. No.	Voltage 50–60 Hz V	Mains current mA	Inrush current A / μ s	Current output DC mA ($\pm 5\%$; for 14W $\pm 7,5\%$)	Voltage output DC (V)	THD at full load % (230 V)	Efficiency at full load % (230 V)	Ripple 100 Hz %
29	ECXe700.729	187566	220–240	160-130	22.5 / 175	350/400/450/500/550/600/650/700	20-42	6	90	<5
44	ECXe1050.730	187567	220–240	240-190	23 / 175	700/750/800/850/900/950/1000/1050	20-42	5	90	<5

Maximum ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient temperature range		Operation humidity range		Storage temperature range		Storage humidity range		Max. operation temperature at t_c point °C	Degree of protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.		
187566	–20	+45	10	95	–40	+80	5	95	80	IP20
187567									85	

Expected service life time

at operation temperatures at t_c point

Operation current	Ref. No.			
	187566		187567	
All	70 °C*	80 °C	75 °C*	85 °C
hrs.	100.000	50.000	100.000	50.000

* recommended operation temperature

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

VS LIGHTING SOLUTIONS
 Vossloh-Schwabe Deutschland GmbH
 Stuttgarter Straße 61/1, 73614 Schorndorf
 Electronic Converter for LED

SEC S727 Q

U_{max} = 60 V...
 U_{rated} = 20...42V...
 P_{rated} = 29.4W
 t_a = -20...+45°C

ECXe700.729

Ref.-No. 187566
 Made in China

Range of application
 DC 176...276 V

PRI

U_N = 220...240V~
 I_N = 160...130mA
 f_N = 0/50/60Hz
 λ = 0.66-0.98

tc=80°C

SELV

I _{out} (mA)	Pin1	Pin2	Pin3
350	OFF	OFF	OFF
400	OFF	OFF	OFF
450	OFF	ON	OFF
500	OFF	ON	ON
550	ON	OFF	ON
600	ON	OFF	ON
650	ON	ON	OFF
700	ON	ON	ON

0.75/1.5/□

■ Z L I

ON 123

110

UK CA

EAC EL

25



VSS
Vossloh-Schwabe Deutschland GmbH
Stuttgarter Straße 61/1, 73614 Schorndorf
Electronic Conversion for LED

SEC 5727 Q

U_{max} = 60 V 

Rated = 20...42V 

ta = 44.1W 

ta = -20...45°C

0.7/1.5 □

ECXe10570.30

Ref.-No. 187567

Made in China

PRI

UN = 220...240V~

IN = 240...190mA

fN = 0/50/60Hz

λ = 0.85-0.99

Range of application
DC 176...276 V

tc=85°C 

SELV 


	Pin1	Pin2	Pin3
700	OFF	OFF	OFF
750	OFF	OFF	OFF
800	OFF	ON	OFF
850	OFF	ON	ON
900	ON	OFF	OFF
950	ON	OFF	ON
1000	ON	ON	OFF
1050	ON	ON	ON

187566/ECXe700.729						
Pin			Output	Current	Voltage	Factory- settings (mA)
1	2	3	W	mA	V	
OFF	OFF	OFF	14,7	350	20-42	350
OFF	OFF	ON	16,8	400		
OFF	ON	OFF	18,9	450		
OFF	ON	ON	21	500		
ON	OFF	OFF	23,1	550		
ON	OFF	ON	25,2	600		
ON	ON	OFF	27,3	650		
ON	ON	ON	29,4	700		


187567/ECXe1050.730						
Pin			Output	Current	Voltage	Factory-
1	2	3	W	mA	V	settings (mA)
OFF	OFF	OFF	29,4	700	20-42	700
OFF	OFF	ON	31,5	750		
OFF	ON	OFF	33,6	800		
OFF	ON	ON	35,7	850		
ON	OFF	OFF	37,8	900		
ON	OFF	ON	39,9	950		
ON	ON	OFF	42	1000		
ON	ON	ON	44,1	1050		



Typ. performance graphs for 187566 / Type ECXe 700.729

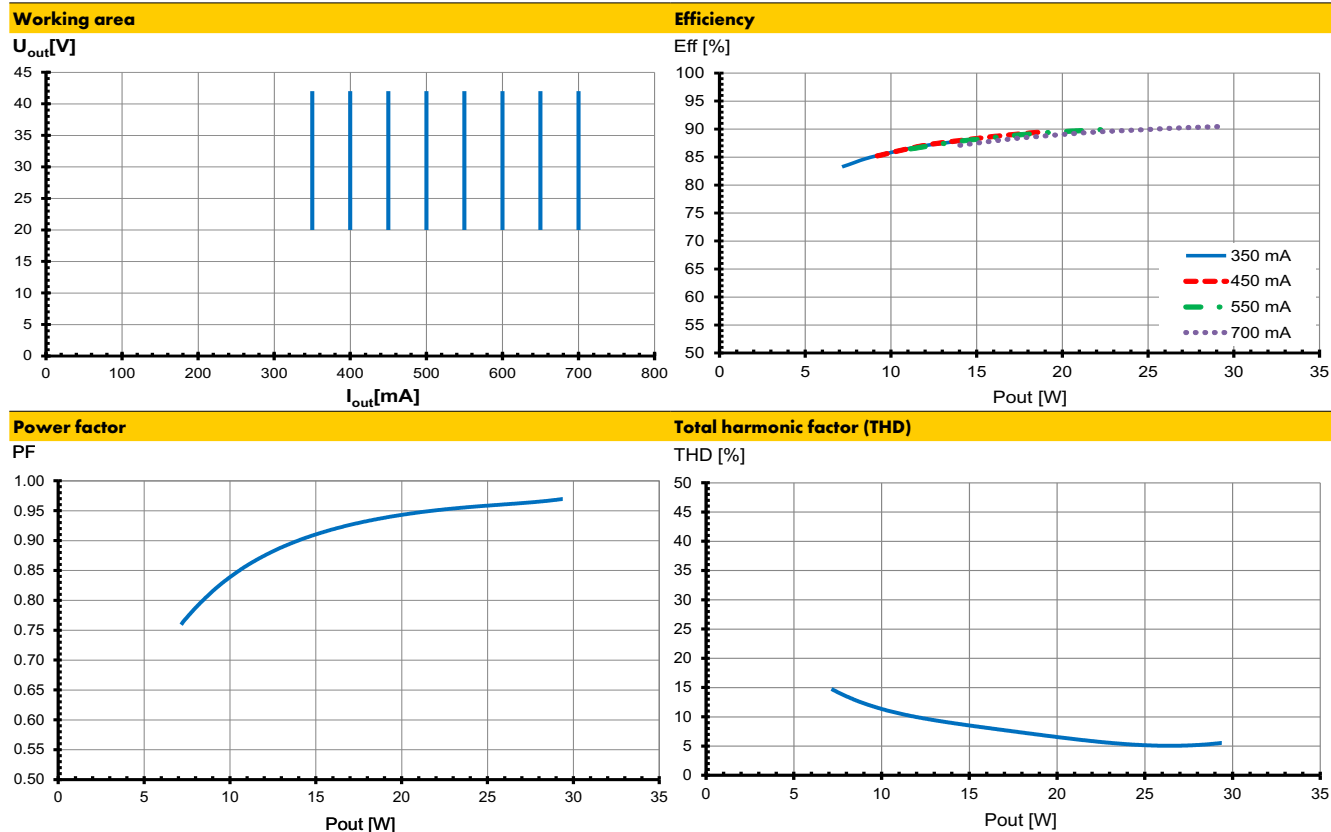

Typ. performance graphs for 187567 / Type ECXe 1050.730

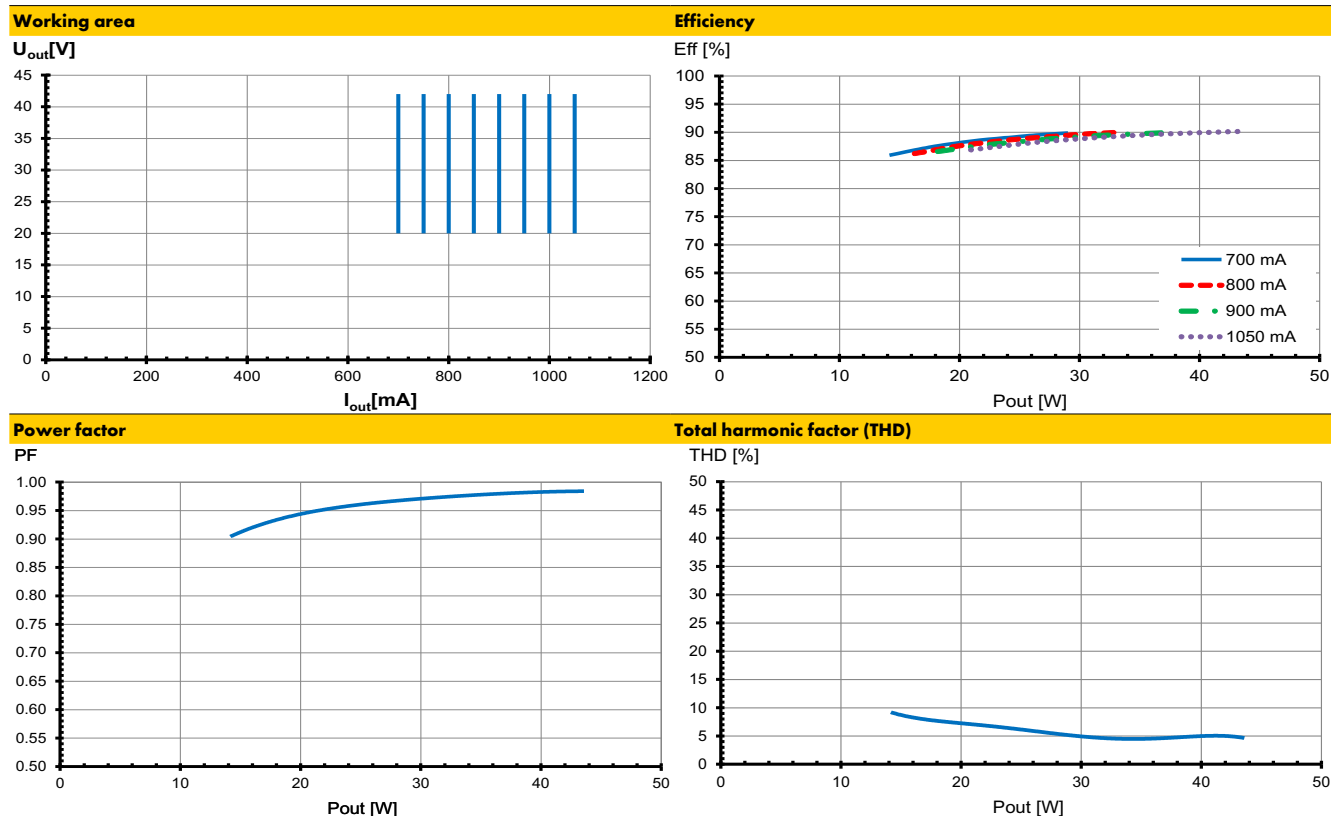

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Safety functions

- Transient mains peaks protection:
Values are in compliance with EN 61547
(interference immunity).
Surges between L–N: up to 1 kV
- Short-circuit protection: The control gear is protected against
permanent short-circuit with automatic restart
function.
- Overload protection: The control gear only works in range of rated
output power and voltage problemfree
($< 60 \text{ V DC}$).
Please check before switch-on mains power
supply that the selected LED load is suitable
(see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection.
- No load operation: The control gear is protected against no load
operation (open load).
- If any of the above mentioned safety functions will be triggered,
disconnect the control gear from the power supply then find and
eliminate the cause of the problem.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

Mandatory regulations

- DIN VDE 0100
- EN 60598-1


Mechanical mounting

- Mounting position: Built-in: Any position inside a luminaire is allowed
Independent application: Drivers are allowed to use for independent applications with separate cord grip.
- Mounting location: LED drivers are designed for integration into luminaires or comparable devices.
Independent LED drivers do not need to be integrated into a casing.
Installation in outdoor luminaires: degree of protection for luminaire with water protection rate ≥ 4 (e.g. IP54 required).
- Degree of protection: IP20
- Clearance: Min. 0.10 m from walls, ceilings and insulation
- Surface: Solid and plane surface for optimum heat dissipation required.
- Heat transfer: If the driver is destined for installation in a luminaire, sufficient heat transfer must be ensured between the driver and the luminaire casing.
LED drivers should be mounted with the greatest possible clearance to heat sources.
During operation, the temperature measure at the driver's t_c point must not exceed the specified maximum value.
- Fastening: Using M4 screws in the designated holes
- Tightening torque: 0.2 Nm

Electrical installation

- Connection terminals: Push-in terminals for rigid or flexible conductors with a section of
built-in: 0,5-1,5mm² PVC cable
independent: 0,75-1,5mm² PVC cable
- Stripped length: 7-8 mm
- Wiring: The mains conductor within the luminaire must be kept short (to reduce the induction of interference).
Mains and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
Max. secondary side lead length: 2 m

- Polarity: Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Secondary load: The sum of forward voltages of LED loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.
- Parallel wiring: Parallel connection of LED loads is not allowed.
- Wiring diagram:



Selection of automatic cut-outs for VS LED drivers

- Dimensioning automatic cut-outs
High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs, which must be selected and dimensioned to suit.
- Release reaction
The release reaction of the automatic conductor cut-outs comply with VDE 0641 part 11 for B characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.
- No. of LED drivers
The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m Ω (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Type	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.					
Automatic cut-out type		B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A
ECXe 700.729	187566	20	27	33	34	45	55
ECXe 1050.730	187567	20	26	32	34	44	54

- To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.