LED LINEAR ALLROUND - 5050

2x6 FOR RECTANGULAR IP OPTICS





LED LINEAR ALLROUND — 5050 — 2x6 FOR RECTANGULAR IP OPTICS

WU-M-631

These modules were designed for built-in into luminaire casings. They enable a modular luminaire design.

The modules are available in 3 white colour tones.

Typical Applications (depending on the choice of optics)

- Integration in luminaires
- Street lighting, urban street lighting
- Tunnel lighting
- Flood and area lighting
- Indoor lighting
- Industrial lighting for:
 - Production halls
 - Warehouses
- Lighting for sports facilities

LED Linear Allround - 5050 - 2x6

- HIGHLY EFFICIENT: UP TO 184 LM/W AT Tp = 60 °C, If = 350 mA
- FLEXIBLE LIGHT DISTRIBUTION BY VARIOUS ATTACHMENT OPTICS
- INITIAL COLOUR ACCURACY: 5 SDCM
- ON-BOARD SURGE PROTECTION UP TO 4 KV (IN COMBINATION WITH VS STREETLIGHT DRIVERS)
- ZHAGA-COMPLIANT MOUNTING DIMENSION (ACC. TO BOOK 19)
- ENEC AND VDE APPROVED (ACC. TO EN 62031)



LED Linear Allround 5050 – 2x6 for rectangular IP optics

Technical Notes

- LED built-in module for integration into luminaires
- 12 high-efficiency High Power LEDs
- Dimensions (excl. optics) LxWxH
 12 LEDs: 146x44.4x6 mm
- Push-in terminals for quick and simple wiring
- Design for optimum thermal management
- Degree of protection: IPOO
- ESD protection class 3a (up to 8 kV)
- NTC resistor for external driver feedback on request
- CRI80 variants on request



Electrical Characteristics

at $t_p = 60$ °C

Туре	No.	Voltage	Voltage DC (V)											Temperature
	of	350 mA			700 mA			1050 mA			1400 mA			coefficient
	LEDs	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	mV/K
WU-M-631	12	31.1	32.7	34.3	32.4	34.1	35.7	33.6	35.3	3 <i>7</i> .1	34.7	36.5	38.2	-10.3

Туре	No.	Power o	Power consumption (W)												
	of	350 mA	350 mA			700 mA			1050 mA			1400 mA			
WU-M	LEDs	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.		
WU-M-631	12	10.9	11.4	12.0	22.7	23.8	25.0	35.3	37.1	38.9	48.6	51.0	53.5		

Use of external LED constant current driver required.

Maximum Ratings

Exceeding the maximum ratings can lead to destruction of the module.

Туре	Operation current	Operation temperature	e range at t _c point	Storage temper	ature range	Max. allowed repetitive peak current				
	mA	°C min.	°C max.	°C min.	°C max.	mA				
All types	≤ 1050	-30	+85	-40	+85	1800				
	≤ 1400	-30	+75	-40	+85	1800				

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



LED Linear Allround 5050 – 2x6 for rectangular IP optics

Optical Characteristics

at $t_p = 60$ °C

Туре	Ref. No.	Colour	Correlated	Luminous flux* (lm) and typ. efficiency (lm/W)											CRI**	
			colour	350 mA			700 mA			1050 mA			1400 mA			
			temperature	min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	min.	typ.	typ.	
			K	lm	lm	lm/W	lm	lm	lm/W	lm	lm	lm/W	lm	lm	lm/W	
WU-M-631-730	569863	warm white	3000	1880	2010	1 <i>7</i> 6	3605	3855	162	5135	5490	148	6585	7040	138	≥ 70
WU-M-631-740	569864	neutral white	4000	2010	2110	184	3855	4045	1 <i>7</i> 0	5490	5755	155	7040	7380	145	≥ 70
WU-M-631-750	569865	cool white	5000	2010	2110	184	3855	4045	1 <i>7</i> 0	5490	5755	155	7040	7380	145	≥ 70

On account of the complex manufacturing process of the modules, the above values only represent statistical variables.

The values do not necessarily correspond exactly to the actual parameters of every single product, which can vary from the typical specification.


* Measurement tolerance of luminous flux: $\pm 7\%$ | ** Measurement tolerance CRI: ± 2

Operating Life

Lumen	Operating life in hours at stated t _c point temperature												
degradation	If ≤ 350 mA			lf 700 mA			lf 1050 mA			lf 1400 mA			
	40 °C	60° C	85 °C	40 °C	60° C	85 °C	40 °C	60° C	85 °C	40 °C	60° C	75 °C	
L80/B10	> 72,000	> 72,000	> 72,000	> 72,000	> 72,000	> 72,000	> 54,000	> 54,000	> 54,000	> 54,000	> 54,000	> 54,000	
L70/B10	> 72,000	> 72,000	> 72,000	> 72,000	> 72,000	> 72,000	> 54,000	> 54,000	> 54,000	> 54,000	> 54,000	> 54,000	


These values do not refer to the colour temperature. | Lxx/Byy (lumen maintenance at xx%, failure rate yy%)

Mechanical Dimensions

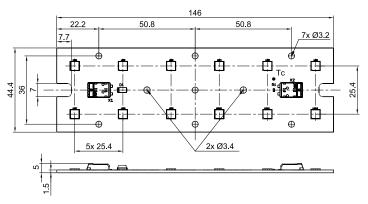


Typical Light Distribution Curve

Data are available in .ldt format for download under www.vossloh-schwabe.com.



Bins

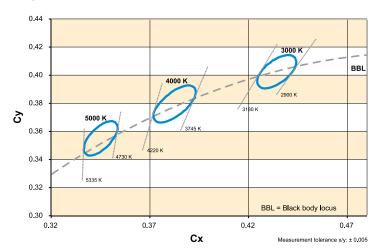

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



ED-Module_LED-Linear_Allround_5050_WU-M-631_EN - 4/5 - 12/2019

LED Linear Allround 5050 – 2x6 for rectangular IP optics

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Safety regulations acc. to EN 60598 has to be observed. Installation must be carried out in a voltage-free state (i.e.disconnection from the mains).

- LED built-in modules must not be subjected to any undue mechanical stress, e. g.:
 - handle LED modules carefully
 - avoid shear and compressive forces onto
 - the optics during handling and installation
 - avoid vibrations of more than 2 kHz, 40 G
- The module must be fixed onto a thermally conductive surface with 2 to 3 M3 screws (respectively M4). Max. allowed torque for M3: 0.5 Nm and M4: 1.2 Nm
- The wiring can be done by solid or stranded wires having a cross section of 0.2–0.75 mm²; stripped length of lead ends of 7–9 mm. For inserting/removing stranded wires press lightly on the push button
- When installing/screwing the module into a luminaire, please ensure that the cables are not squeezed between luminaire/heat sink and LED module. Also ensure that the mounting surface is clean and flat. For a reliable thermal attachment, we recommend the mounting surface flatness of ≤ 0.2 mm.
- Safe operation only possible by the use of external constant current sources (I_{max.} see table "Electrical Characteristics").
- Operation is dependent on constant current drivers that should provide the following protective measures:
 - short-circuit protection
 - overload protection
 - overheating protection
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- The maximum output of the power supply must be observed.
- For optimal load of used constant current driver the modules can
 only be connected in series. The quantity of LED modules is limited
 by the sum of forward voltage and the capacity of used constant
 current driver. Safety regulations acc. to EN 60598 has to be
 observed if the sum of forward voltage exceed the permitted
 touchable value.
- The clearance and creepage distances of LED modules WU-M-631 are designed for working voltages up to 500 V DC (basic insulation) acc. to EN 62031/EN 60598.

- If a system consists of multiple LED Linear Allround modules connected to a single driver, only one module will be monitored by the NTC. That means that one module is in "master" mode operated and the rest are operated in "slave" mode.
- Please ensure standard ESD (electrostatic discharge) protection measures are employed when handling and installing LED modules. Electrostatic discharge can damage LEDs.
- To ensure problem-free operation, the specified maximum temperature at the t_c and t_p point (see "Operating Life") must be observed (measured in accordance with EN 60598-1). To satisfy this point, it is necessary to put measures in place to ensure any heat is dissipated from the LED module to the environment.
- To ensure good thermal contact, it is recommended to use proper thermal interface material (e.g. thermal paste, phase change or thermal pads).
- When mounting LED Linear Allround modules directly on the luminaire housing, we reccommend to use aluminum of at least 3 mm thickness. Thicker material will improve the heatflow through the luminaire, resulting in a lower t_D temperature on the module itself.
- Use anodised or painted surfaces rather than blank surfaces to enhance the heat-transfer via thermal radiation.
- Try to limit as far as possible the number of thermal interfaces in the primary heat path towards ambient air. For the primary heat path use solely materials with high thermal conductivity (e.g. aluminum).
- The LED Linear Allround modules are built-in modules and have no IP-classification (IPOO). They are not designed for operation in "open air". In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognised as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- A parallel connection of the modules is not allowed.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure.
 Detailed information can be found in our "Chemical Incompatibility"
 PDF on our website www.vossloh-schwabe.com

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



LED Linear Allround 5050 – 2x6 for rectangular IP optics

Assembly and Safety Information

- The photobiological safety of the LED modules must be classified into risk groups in accordance with EN 62471: 2008.
 - general lighting exempt group: WU-M-631
 - other applications
 risk group 2: WU-M-631



Assessment in acc. with IEC/TR 62778:

Given a clearance of more than d_{min} , within which the lighting intensity limit of $E_{thr} = 900 \text{ lx}$ is attained, the classification goes down to Risk Group 1.

Applied Standards

EN 62031

LED modules for general lighting - Safety specifications



FN 62471

Photobiological safety of lamps and lamp systems

Product Guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com).

We will be happy to send you these conditions upon request.